


1 CORE @ 0.5MMSQ PER CALL BUTTON ON PANEL.

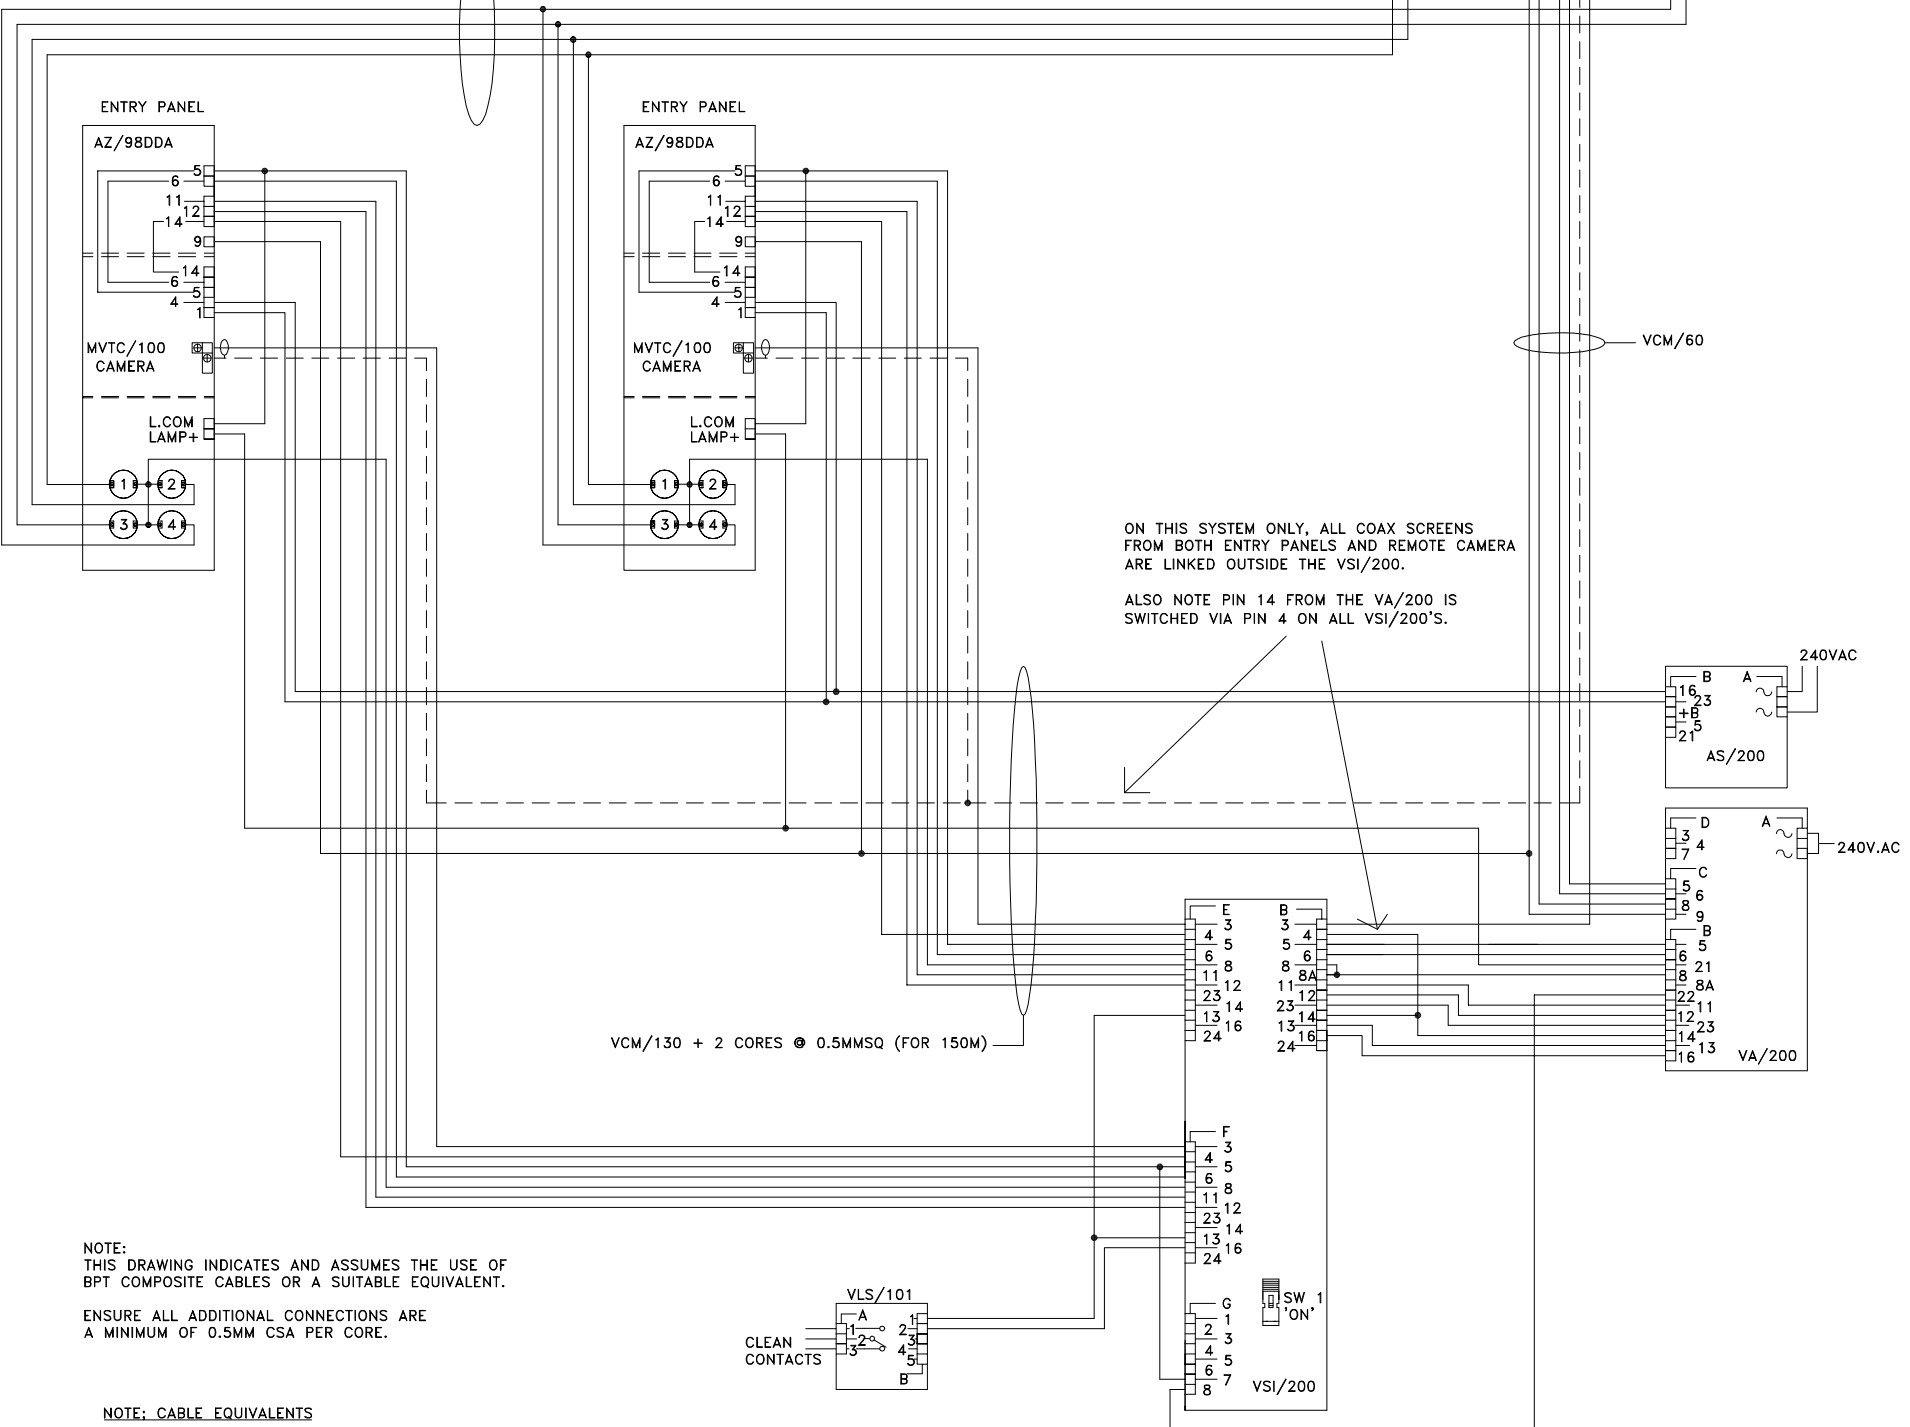

NOTE: THIS DRAWING INDICATES AND ASSUMES THE USE OF BPT COMPOSITE CABLES OR A SUITABLE EQUIVALENT.

ENSURE ALL ADDITIONAL CONNECTIONS ARE A MINIMUM OF 0.5MM CSA PER CORE.

NOTE: CABLE EQUIVALENTS

VCM/130 = RG59 COAX + 4 CORES @ 1.0MMSQ + 8 CORES @ 0.5MMSQ

VCM/60 = RG59 COAX + 2 CORES @ 1.0MMSQ + 3 CORES @ 0.5MMSQ

BPT (UK) LTD. HERTS. ENGLAND	PREPARED FOR INSTALLER INFORMATION	DATE: 04/04/07	DRAWN:RC
	DRAWING TITLE: MULTI-FLAT INSTALLATION USING 1 DUAL HEIGHT COLOUR DDA VIDEO ENTRY PANEL	REVISED:	DRAWING No: B-4V2Y4CDDA